

CP 155 (-LS)

PRODUCT PASS

Date: **16-01-2024**

Language: **English**



Together for better
www.reynaers.com

1 GENERAL EXPLANATION

The performances indicated in this product pass can be used for a Declaration of Performance (DoP) in accordance with EU Regulation no. 305/2011. The characteristics are in accordance with the harmonized product standard EN 14351-1:2006+A2:2016 (Windows and doors - Product standard, performance characteristics - Part 1: Windows and external pedestrian doorsets).

At least one performance of an essential characteristic shall be mentioned on the DoP. Non-essential characteristics are not legally required in any European country and thus not mandatory to declare. Where no performance is declared "NPD" (No Performance Declared) can be used.

The performances indicated can be achieved for the configuration and dimensions as tested and when the product is fabricated in accordance with the instructions of Reynaers (system catalogue). It is obviously allowed to declare lower performances; e.g. when resistance to wind load of 1600 Pa was tested, also 1200 Pa can be declared for the same configuration and dimensions.

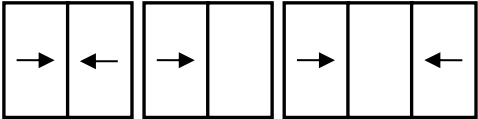
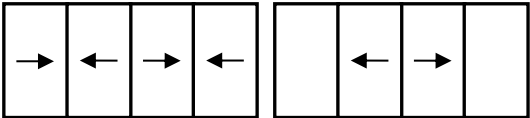
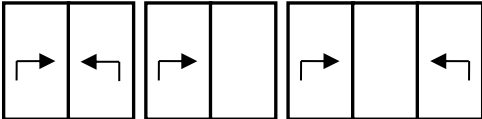
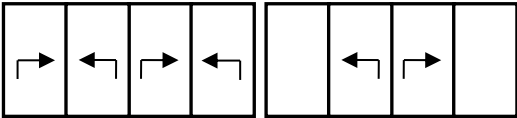
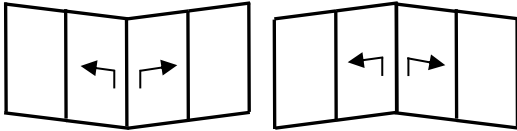
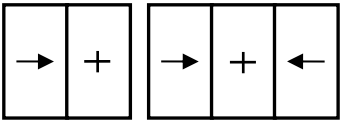
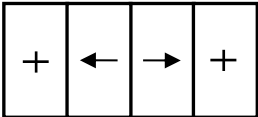
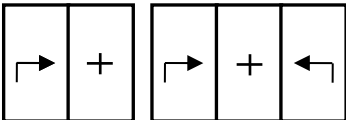
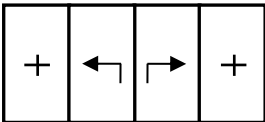

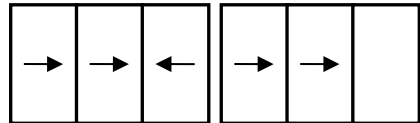
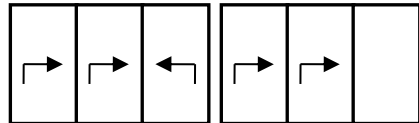
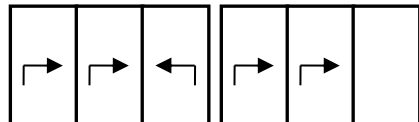
Higher performances for smaller dimensions, lower performances for larger dimensions, or similar performances for larger dimensions but with the appropriate selection of profiles and/or reinforcements are possible. Validate your performances and deflections, adhering to the maximum admissible dimensions indicated in the system catalogue.

2 NOTIFIED BODIES

ID	Name	Address	Country
0074	CENTRE D'EXPERTISE DU BÂTIMENT ET DES TRAVAUX PUBLICS	Domaine De Saint-Paul – 102, Route de Limours 78471 Saint-Remy-Les-Chevreuse Cedex	France
0432	MATERIALPRÜFUNGSAMT NORDRHEIN-WESTFALEN	Auf den Thränen 2 59597 Erwitte	Germany
0679	CENTRE SCIENTIFIQUE ET TECHNIQUE DU BÂTIMENT	84, Avenue Jean Jaurès Champs-sur-Marne F-77447 Marne-la-Vallée Cedex 2	France
0744	SOCOTEC	Les Quadrants – 3,Avenue du Centre – Guyancourt 78182 St-Quentin en Yvelines	France
0749	BELGIAN CONSTRUCTION CERTIFICATION ASSOCIATION	Aarlenstraat 53 1040 Brussel	Belgium
0757	IFT ROSENHEIM	Theodor-Gietl-Strasse 7-9 83026 Rosenheim	Germany
0845	DANISH INSTITUTE OF FIRE AND SECURITY TECHNOLOGY	Jernholmen, 12 2650 Hvidovre	Denmark
0960	SKG-IKOB	Poppenbouwing 56 4191 NZ Geldermalsen	Netherlands
1136	BELGIAN BUILDING RESEARCH INSITUTE	Lombardstraat 42 1000 Brussel	Belgium
1234	EFFECTIS NEDERLAND	Brandpuntlaan Zuid 16, Postbus 554 2665 ZN Bleiswijk	Netherlands
1288	WINTech ENGINEERING LIMITED	Halesfield 2 Telford, Shropshire TF7 4QH	United Kingdom
1309	PRÜFINSTITUT SCHLÖSSER UND BESCHLÄGE, VELBERT	Wallstrasse 41 42551 Velbert	Germany
1488	INSTYTUT TECHNIKI BUDOWLANEJ	ul. Filtrowa 1 00-611 Warszawa	Poland
1671	PEUTZ	Lindenlaan 41, Molenhoek PO Box 66 6585 ZH MOOK	Netherlands
1749	TNO DEFENCE, SECURITY AND SAFETY	Lange Kleiweg 137, Postbus 45 2280 AA Rijswijk	Netherlands
1769	UNIVERSITY OF GENT	Sint-Pietersnieuwstraat 41 9000 Gent	Belgium
2211	INSTITUTO DE INVESTIGAÇÃO E DESENVOLVIMENTO TECNOLÓGICO PARA A CONSTRUÇÃO, ENERGIA, AMBIENTE E SUSTENTABILIDADE	Rua Pedro Hispano Pólo II da Universidade de Coimbra 3030-289 Coimbra	Portugal

3 VARIANTS


Different variants have been grouped based on similar design and following the guidelines of the harmonised standard

Slide		Lift Slide	
5.1	2-rail  	5.4	2-rail 
		5.5	2-rail 
		5.6	2-rail - Corner 
5.2	Monorail  	5.7	Monorail  
		5.8	Minergie 
5.3	3-rail 	5.9	3-rail 
		5.10	3-rail - Zero threshold 


Slide		Lift Slide	
		5.11	4-rail <div><div><div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div></div></div><div><div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div></div></div></div>

4 EXPLANATIONS AND SYMBOLS

H: Element Height
B: Element Width
Fh: Vent Height
Fb: Vent Width
npd: No Performance Declared
CWFT: Classification Without Further Testing




Sliding vent



Lift sliding vent



Fixed vent



Fixed pane monorail

⁽¹⁾ Report for CP 96 and/or CP 96-LS can be used because of identical or equivalent accessories

⁽²⁾ Standard glazing beads: P < 2000 Pa, WxH < 1400x2400; P < 1200 Pa, WxH < 3200x3200.

Tubular glazing beads: P < 2000 Pa, WxH < 3200x3200 (SKG 10.185a).

⁽³⁾ BT lock



5 PERFORMANCE

5.1 2-rail Slide



Characteristic			Performance		Notified body - Report	Tested size [mm]
Essential characteristics						
EN 14351-1	4.2	Resistance to wind load	C3 (1200 Pa)		[0960] – 08.1061	1563x2406 ⁽²⁾
	4.5	Watertightness	8A (450 Pa)		[0960] – 08.1061	1563x2406
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.			
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-4	821x1729
	4.8	Load-bearing capacity of safety devices	npd			
	4.9	Height & width	See 6			
	4.11	Acoustic performance	Glass:	Sliding door:		
			34 (-1;-4) 41 (-2;-4) 50 (-2;-8)	35 (-2;-4) 37 (-1;-2) 40 (0;-2)	[0757] – 162 34130/3 R1	2670x2510
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.			
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass			
4.14	Air permeability	4		[0960] – 08.1061	1563x2406	
Non-essential characteristics						
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6	
	4.16	Operating forces	1		[0960] – 20.00192 [0960] – 20.00349	2150x2896, 300 kg
	4.17	Mechanical strength	npd			
	4.18	Ventilation	npd			
	4.19	Bullet resistance (BP version)	npd			
	4.20	Explosion resistance	npd			
	4.21	Resistance to repeated opening and closing	3 (20 000)		0960] – 20.00192 [0960] – 20.00349	2150x2896, 300 kg
	4.22	Behaviour between different climates	npd			
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121 [0960] – 20.00188 ⁽³⁾	See report


5.2 Monorail Slide



Characteristic			Performance		Notified body - Report		Tested size [mm]	
Essential characteristics								
EN 14351-1	4.2	Resistance to wind load	C4 (1600 Pa)		[0960] – 08.1059 ⁽¹⁾		1472x2422 ⁽²⁾	
	4.5	Watertightness	7A (300 Pa)		[0960] – 08.1059		1472x2422	
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.					
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-4		821x1729	
	4.8	Load-bearing capacity of safety devices	npd					
	4.9	Height & width	See 6					
	4.11	Acoustic performance	Glass:	Sliding door:	[0757] – 162 34130/3 R1		2670x2510	
			34 (-1;-4) 41 (-2;-4) 50 (-2;-8)	35 (-2;-4) 37 (-1;-2) 40 (0;-2)				
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Pre-calculated U-values for dimensions 2000x2180mm can be found in the Uf-value tables. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.					
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass					
4.14	Air permeability	4		[0960] – 08.1059		1472x2422		
Non-essential characteristics								
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6			
	4.16	Operating forces	1		[0960] – 20.00192 [0960] – 20.00349		2150x2896, 300 kg	
	4.17	Mechanical strength	npd					
	4.18	Ventilation	npd					
	4.19	Bullet resistance (BP version)	npd					
	4.20	Explosion resistance	npd					
	4.21	Resistance to repeated opening and closing	3 (20 000)		[0960] – 20.00192 [0960] – 20.00349		2150x2896, 300 kg	
	4.22	Behaviour between different climates	npd					
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121 [0960] – 20.00188 ⁽³⁾		See report	


^(*) inside glazing of fixed vent; sliding vent positioned on the outside

5.3 3-rail Slide



Characteristic			Performance		Notified body - Report	Tested size [mm]	
Essential characteristics							
EN 14351-1	4.2	Resistance to wind load	C3 (1200 Pa)		[0960] – 08.1061	1404x2356 ⁽²⁾	
	4.5	Watertightness	8A (450 Pa)		[0960] – 08.1061	1404x2356	
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.				
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-4	821x1729	
	4.8	Load-bearing capacity of safety devices	npd				
	4.9	Height & width	See 6				
	4.11	Acoustic performance	Glass:	Sliding door:			
			34 (-1;-4)	35 (-2;-4)			
			41 (-2;-4)	37 (-1;-2)	[0757] – 162 34130/3 R1		
			50 (-2;-8)	40 (0;-2)	2670x2510		
4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.					
4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass					
4.14	Air permeability	4		[0960] – 08.1061	1404x2356		
Non-essential characteristics							
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6		
	4.16	Operating forces	1		[0960] – 20.00192 [0960] – 20.00349	2150x2896, 300 kg	
	4.17	Mechanical strength	npd				
	4.18	Ventilation	npd				
	4.19	Bullet resistance (BP version)	npd				
	4.20	Explosion resistance	npd				
	4.21	Resistance to repeated opening and closing	3 (20 000)		[0960] – 20.00192 [0960] – 20.00349	2150x2896, 300 kg	
	4.22	Behaviour between different climates	npd				
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121 [0960] – 20.00188 ⁽³⁾	See report	

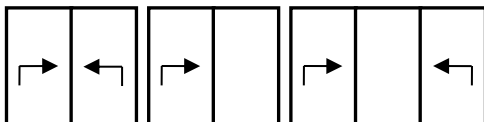5.4 2-rail Lift Slide




Characteristic			Performance		Notified body - Report		Tested size [mm]	
Essential characteristics								
EN 14351-1	4.2	Resistance to wind load	C3 (1200 Pa) C3 (1200 Pa) C3 (1200 Pa) C2 (800 Pa)		[0960] – 18.00477 [0960] – 20.00713 (**) [0960] – 18.00540 Rev A (*) [1488] – LK02-00948/14/R73NK		1500x2380 ⁽²⁾ 1487x2381 ⁽²⁾ 1468x2380 ⁽²⁾ 2497x3386 ⁽²⁾	
	4.5	Watertightness	E900 (900 Pa) E750 (750 Pa) 9A (600 Pa) 8A (450 Pa)		[0960] – 18.00477 [0960] – 20.00713 (**) [0960] – 18.00540 Rev A (*) [1488] – LK02-00948/14/R73NK		1500x2380 1487x2380 1468x2380 2497x3386	
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.					
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-5		821x1729	
	4.8	Load-bearing capacity of safety devices	npd					
	4.9	Height & width	See 6					
	4.11	Acoustic performance	Glass:	Sliding door:				
			34 (-1;-4) 41 (-2;-4) 50 (-2;-8)	35 (-2;-5) 38 (-1;-3) 42 (-1;-3)	[0757] – 162 34130/4 R1		2670x2510	
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.					
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass					
	4.14	Air permeability	4		[0960] – 18.00477 [0960] – 20.00713 (**) [0960] – 18.00540 Rev A (*) [1488] – LK02-00948/14/R73NK		1500x2380 1487x2380 1468x2380 2497x3386	
Non-essential characteristics								
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6			
	4.16	Operating forces	2		[1769] – 363/2513		1998x2886, 219 kg	
	4.17	Mechanical strength	npd					
	4.18	Ventilation	npd					
	4.19	Bullet resistance (BP version)	npd					
	4.20	Explosion resistance	npd					
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)		[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681		1428x2219, 150 kg 2700x3500, 296 kg	
	4.22	Behaviour between different climates	npd					
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121		See report	

(*) Slim Chicane


(**) Motorized

5.5 2-rail Lift Slide





Characteristic			Performance		Notified body - Report	Tested size [mm]	
Essential characteristics							
EN 14351-1	4.2	Resistance to wind load	B3 (1200 Pa)		[0960] - 16.00865 Rev A	1649x2986 ⁽²⁾	
	4.5	Watertightness	8A (450 Pa)		[0960] - 16.00865 Rev A	1649x2986	
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.				
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-5	821x1729	
	4.8	Load-bearing capacity of safety devices	npd				
	4.9	Height & width	See 6				
	4.11	Acoustic performance	Glass:	Sliding door:			
			34 (-1;-4) 41 (-2;-4) 50 (-2;-8)	35 (-2;-5) 38 (-1;-3) 42 (-1;-3)	[0757] – 162 34130/4 R1	2670x2510	
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.				
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass				
4.14	Air permeability	4		[0960] - 16.00865 Rev A	1649x2986		
Non-essential characteristics							
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6		
	4.16	Operating forces	2		[1769] – 363/2513	1998x2886, 219 kg	
	4.17	Mechanical strength	npd				
	4.18	Ventilation	npd				
	4.19	Bullet resistance (BP version)	npd				
	4.20	Explosion resistance	npd				
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)		[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681	1428x2219, 150 kg 2700x3500, 296 kg	
	4.22	Behaviour between different climates	npd				
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121	See report	

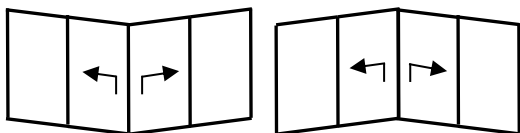5.6 2-rail Lift Slide - Corner



Characteristic			Performance	Notified body - Report	Tested size [mm]
Essential characteristics					
EN 14351-1	4.2	Resistance to wind load	C2 (800 Pa)	[0960] - 15.01116	1728x2886 ⁽²⁾
	4.5	Watertightness	7A (300 Pa)	[0960] - 15.01116	1728x2886
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.		
	4.7	Impact resistance	5	[0960] – SKG/HRU/cbo10.0099-5	821x1729
	4.8	Load-bearing capacity of safety devices	npd		
	4.9	Height & width	See 6		
	4.11	Acoustic performance	npd		
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.		
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass		
	4.14	Air permeability	3	[0960] - 15.01116	1728x2886
Non-essential characteristics					
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E	EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6	
	4.16	Operating forces	2	[1769] – 363/2513	1998x2886, 219 kg
	4.17	Mechanical strength	Npd		
	4.18	Ventilation	npd		
	4.19	Bullet resistance (BP version)	npd		
	4.20	Explosion resistance	npd		
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)	[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681	1428x2219, 150 kg 2700x3500, 296 kg
	4.22	Behaviour between different climates	npd		
	4.23	Burglar resistance (AP version)	npd		


5.7 Monorail lift slide



Characteristic			Performance		Notified body - Report		Tested size [mm]	
Essential characteristics								
EN 14351-1	4.2	Resistance to wind load	B2 (800 Pa)		[0960] – 16.00150 ^(*)		2498x2896 ⁽²⁾	
	4.5	Watertightness	8A (450 Pa)		[0960] – 16.00150 ^(*)		2498x2896	
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.					
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-5		821x1729	
	4.8	Load-bearing capacity of safety devices	Npd					
	4.9	Height & width	See 6					
	4.11	Acoustic performance	Glass:	Sliding door:				
			34 (-1;-4) 41 (-2;-4) 50 (-2;-8)	35 (-2;-5) 38 (-1;-3) 42 (-1;-3)	[0757] – 162 34130/4 R1		2670x2510	
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.					
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass					
4.14	Air permeability	4		[0960] – 16.00150 ^(*)		2498x2896		
Non-essential characteristics								
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6			
	4.16	Operating forces	2		[1769] – 363/2513		1998x2886, 219 kg	
	4.17	Mechanical strength	npd					
	4.18	Ventilation	npd					
	4.19	Bullet resistance (BP version)	npd					
	4.20	Explosion resistance	npd					
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)		[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681		1428x2219, 150 kg 2700x3500, 296 kg	
	4.22	Behaviour between different climates	npd					
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121		See report	


^(*) outside glazing of fixed vent; sliding vent positioned on the inside

5.8 Minergie




Characteristic			Performance		Notified body - Report		Tested size [mm]	
Essential characteristics								
EN 14351-1	4.2	Resistance to wind load	C3 (1200 Pa) C2 (800 Pa)		[1488] – LZE00-00948/17/R131NZE [1488] – LK02-00948/14/R76NK		1380x2790 ⁽²⁾ 2497x3387 ⁽²⁾	
	4.5	Watertightness	9A (600 Pa)		[1488] – LZE00-00948/17/R131NZE [1488] – LK02-00948/14/R76NK		1380x2790 2497x3387	
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.					
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-5		821x1729	
	4.8	Load-bearing capacity of safety devices	npd					
	4.9	Height & width	See 6					
	4.11	Acoustic performance	Glass: 33 (-1;-4) 40 (-1;-3) 46 (-2;-5) 52 (-1;-5) 52 (-1;-5)	Sliding door: 32 (-1;-4) 37 (-2;-5) 39 (-1;-4) 42 (-1;-4) 43 (-1;-4)	[0960] - 17.00192 [0960] - 17.00255 [0960] - 17.00293 [0960] - 17.00305 [0960] - 17.00325		2705x2360	
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.					
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass					
	4.14	Air permeability	4		[1488] – LZE00-00948/17/R131NZE [1488] – LK02-00948/14/R76NK		1380x2790 2497x3387	
Non-essential characteristics								
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6			
	4.16	Operating forces	2		[1769] – 363/2513		1998x2886, 219 kg	
	4.17	Mechanical strength	npd					
	4.18	Ventilation	npd					
	4.19	Bullet resistance (BP version)	npd					
	4.20	Explosion resistance	npd					
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)		[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681		1428x2219, 150 kg 2700x3500, 296 kg	
	4.22	Behaviour between different climates	npd					
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121		See report	

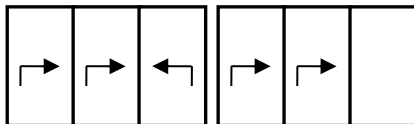
5.9 3-rail Lift Slide



Characteristic			Performance		Notified body - Report	Tested size [mm]	
Essential characteristics							
EN 14351-1	4.2	Resistance to wind load	C2 (800 Pa)		[1488] – LK02-00948/14/R73NK	2497x3386 ⁽²⁾	
	4.5	Watertightness	8A (450 Pa)		[1488] – LK02-00948/14/R73NK	2497x3386	
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.				
	4.7	Impact resistance	5		[0960] – SKG/HRU/cbo10.0099-5	821x1729	
	4.8	Load-bearing capacity of safety devices	npd				
	4.9	Height & width	See 6				
	4.11	Acoustic performance	Glass:	Sliding door:	[0757] – 162 34130/4 R1		2670x2510
			34 (-1;-4) 41 (-2;-4) 50 (-2;-8)	35 (-2;-5) 38 (-1;-3) 42 (-1;-3)			
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.				
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass				
4.14	Air permeability	4		[1488] – LK02-00948/14/R73NK	2497x3386		
Non-essential characteristics							
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E		EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6		
	4.16	Operating forces	2		[1769] – 363/2513	1998x2886, 219 kg	
	4.17	Mechanical strength	npd				
	4.18	Ventilation	npd				
	4.19	Bullet resistance (BP version)	npd				
	4.20	Explosion resistance	npd				
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)		[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681	1428x2219, 150 kg 2700x3500, 296 kg	
	4.22	Behaviour between different climates	npd				
	4.23	Burglar resistance (AP version)	RC 2		[1309] – 45-2/20.121	See report	

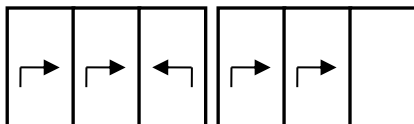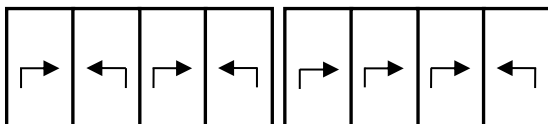5.10 3-rail Lift Slide - Zero Threshold


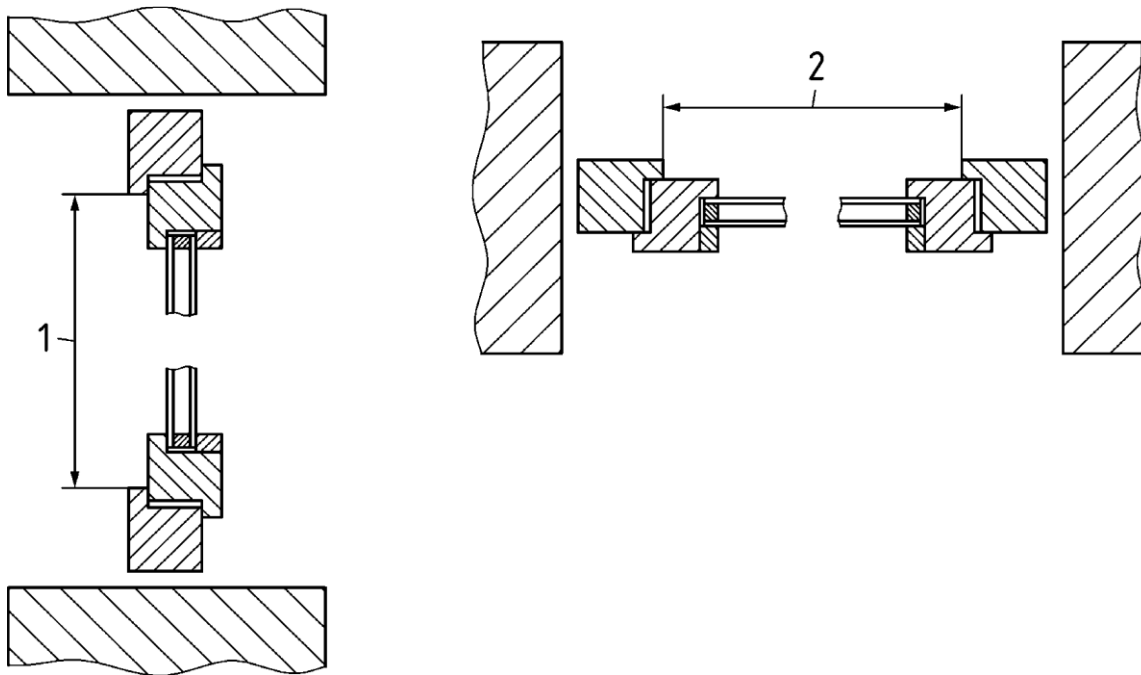
Characteristic			Performance	Notified body - Report	Tested size [mm]
Essential characteristics					
EN 14351-1	4.2	Resistance to wind load	C2 (800 Pa)	[0960] – 14.01031-Rev A	1302x2867 ⁽²⁾
	4.5	Watertightness	8A (450 Pa)	[0960] – 14.01031-Rev A	1302x2867
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.		
	4.7	Impact resistance	5	[0960] – SKG/HRU/cbo10.0099-5	821x1729
	4.8	Load-bearing capacity of safety devices	npd		
	4.9	Height & width	See 6		
	4.11	Acoustic performance	npd		
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.		
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass		
	4.14	Air permeability	3	[0960] – 14.01031-Rev A	1302x2867
Non-essential characteristics					
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E	EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6	
	4.16	Operating forces	2	[1769] – 363/2513	1998x2886, 219 kg
	4.17	Mechanical strength	npd		
	4.18	Ventilation	npd		
	4.19	Bullet resistance (BP version)	npd		
	4.20	Explosion resistance	npd		
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)	[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681	1428x2219, 150 kg 2700x3500, 296 kg
	4.22	Behaviour between different climates	npd		
	4.23	Burglar resistance (AP version)	npd		

5.11 4-rail Lift Slide


Characteristic			Performance	Notified body - Report	Tested size [mm]
Essential characteristics					
EN 14351-1	4.2	Resistance to wind load	A3 (1200 Pa)	[0960] – 14.01030-Rev A	1302x2886 ⁽²⁾
	4.5	Watertightness	7A (300 Pa)	[0960] – 14.01030-Rev A	1302x2886
	4.6	Dangerous substances	In the materials delivered by Reynaers, no dangerous substances as indicated in hEN 14351-1 are used.		
	4.7	Impact resistance	5	[0960] – SKG/HRU/cbo10.0099-5	821x1729
	4.8	Load-bearing capacity of safety devices	npd		
	4.9	Height & width	See 6		
	4.11	Acoustic performance	npd		
	4.12	Thermal transmittance	Ud to be calculated in function of the project. Uf-values are calculated under certification of BCCA: certificate BPCB-420-72-10077/2.		
	4.13	Radiation properties	These properties must be evaluated by the CE-label of the glass		
	4.14	Air permeability	3	[0960] – 14.01030-Rev A	1302x2886
Non-essential characteristics					
EN 14351-1	4.4.1	Reaction to fire	Anodized: A1 Painted: A2 Gaskets: E	EC decision 96/603/EC certificate EFR-21-001664A [0432] – 230006500-6	
	4.16	Operating forces	2	[1769] – 363/2513	1998x2886, 219 kg
	4.17	Mechanical strength	npd		
	4.18	Ventilation	npd		
	4.19	Bullet resistance (BP version)	npd		
	4.20	Explosion resistance	npd		
	4.21	Resistance to repeated opening and closing	4 (50 000) 3 (20 000)	[0960] – 09.1125 ⁽¹⁾ [0960] – 15.00681	1428x2219, 150 kg 2700x3500, 296 kg
	4.22	Behaviour between different climates	npd		
	4.23	Burglar resistance (AP version)	npd		

6 RULE FOR DEFINITION OF CLEAR OPENING HEIGHT AND WIDTH

The clear opening height 1 and clear opening width 2 are defined as indicated in following sketches of EN 12519:2018.



UPDATES

30/6/2022

	VARIANTS	Characteristic
EFR-21-001664A	5.1 ~ 5.11	4.4.1
230006500-6	5.1 ~ 5.11	4.4.1
20.00188	5.1 ~ 5.3	4.23
20.00349	5.1 ~ 5.3	4.16, 4.21
20.00713	5.4	4.2, 4.5, 4.14

08/06/2023

	VARIANTS	Characteristic
45-2/20.121	5.1 ~ 5.5, 5.7 ~ 5.9	4.23

16/01/2024

	VARIANTS	Characteristic
Text revision	GENERAL EXPLANATION	
Tested size [mm]	5.1 – 5.11	
Text revision	5.1 – 5.11	4.12